

Ventilation Systems

ECOLOGICAL




Pulley and bracket design provides positive seal for the curtain in closed position.



Either

A. Timber side rail with battens.

B. Steel purlin with aluminium grip rail attached.

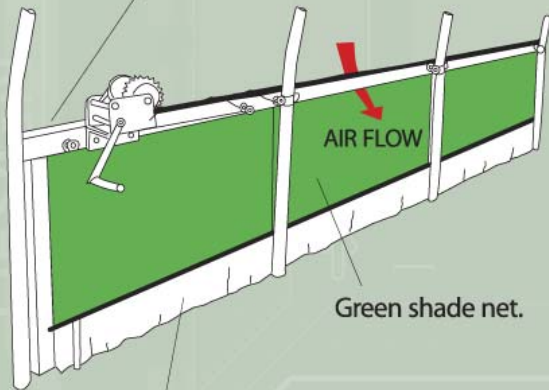

Green shade net.

A Polythene Curtain can be dug into a trench with the netting or attached to either a timber 75 x 50mm base rail or a steel purlin with aluminium grip rail attached.



Netted side ventilation system


This system is designed to provide a high level air intake so that fresh air enters the structure above the crop and does not shock the plants. Being fixed at ground level, the curtain prevents draughts and "drying out" at the edges of the crop.

Horticulture Growing Houses

Roll-up System


Roll up Curtain using Polythene or LS Solarwoven material, operated using manual gearbox and handle, alternatively these may be motorised incorporating thermostatic control.

This system can be provided to side/end walls and can operate upto 3.5m high using LS Solarwoven material.

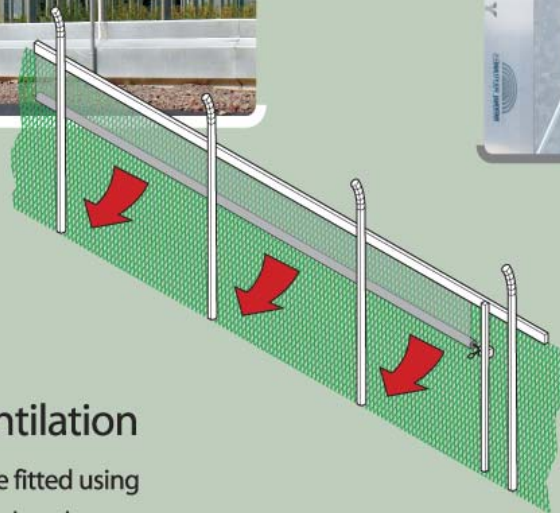

Multi Span Roof Ventilation

A roof ventilation system can be fitted using a rack and pinion system, either hand operated or motorised, which allows air to be expelled from the middle of the structure where "Hot Spots" may otherwise occur and simultaneously pull cold air in from the sides of the structure so providing an air current through the house.

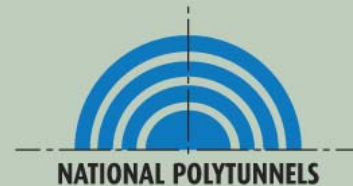

Fan ventilation

Fans can be used to pull air through the polytunnel to control temperature and eliminate stagnant air.

This and the air movement created can lead to stronger and healthier plants. Fans are 48" wide and are used in conjunction with Air Inlets.

National Polytunnels Ltd, 4 Cable Court, Pittman Way,
Fulwood, Preston, Lancashire PR2 9YW.

Tel: 01772 799200 Fax: 01772 799250

Email: sales@nationalpolytunnels.co.uk

Information is correct at the time of issue, however we reserve the right to change design/specifications without prior notice.

Horticulture Growing Houses